

Interactive Visual Presenter L-12iD

High Quality Images, Premium Features


Easy operation with one hand.



* The rotating camera head turns 300 degrees allowing projection from various angles.

High Image Quality & Advanced 96X Zoom

The L-12iD- 3.4M pixel CMOS 1/2.8" Image Sensor, produces full HD 1080p resolution with outstanding color reproduction and sharp image resolution. Moreover, the incredible 96x zoom (12x optical and 8x Digital) means the L-12iD can display the smallest objects clearly for a spectacular audience experience.

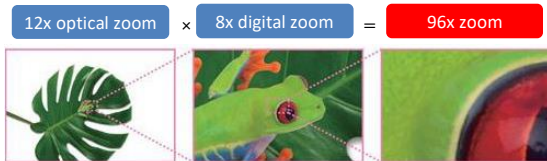


Save Classroom Presentations on External Memory

Both still images (jpg) and audio video files (mp4) can be saved on a USB flash drive or SD Memory Card for future use. Files may also be saved to a PC or Mac using Image Mate Software (included).



Reproduces Smooth Motion

The L-12iD captures and reproduces moving images at 30fps (frame per second) for the display of truly smooth, natural motion.

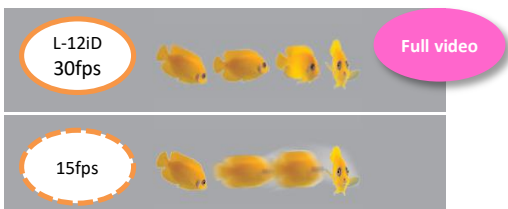

Easy Control at Your Fingertips

A simple turn of the zoom dial is all that is needed to zoom in, zoom out and make fine zoom adjustments. For added ease of use, the AF (Auto Focus) button enables easy one-touch auto focusing.




Interactive Visual Presenter L-12iD

Presentation Support Tools

The L-12iD's ergonomically designed remote control brings convenient functions to classroom presentations.

Split Screen

Show a still image and a live image simultaneously.

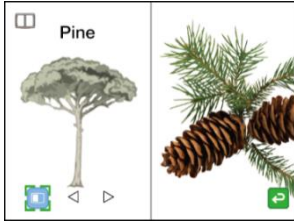


Highlight

Draw attention to a particular section of an image.



Mask

Hide a selected part of an image from view.



Mosaic

Give images a mosaic-like effect.

Picture-in-Picture

Display a quarter-size still image along with a live image.

Color Filter

Blacken specific colored parts of an image.

MAIN CAMERA

IMAGE PICK-UP DEVICE	1/2.8" CMOS	FLICKER CORRECTION	Provided
EFFECTIVE PIXELS	H2048, V1536	WHITE BALANCE	Auto / Manual
FRAME RATE	30 fps	EDGE ENHANCEMENT	Provided
ZOOM	12 x Optical zoom (8 x digital zoom)	PAUSE	Provided
LENS	f=4.0mm ~ 48.0mm(12x zoom)	STILL IMAGE STORAGE	Provided
SHOOTING AREA	MAX 297mm x 420mm (SXGA)	MOVIE STORAGE	Provided
FOCUS	Auto / Manual / Zoom Sync	GANMA SETTING	Provided
RESOLUTION	1080p / 720p / SXGA / WXGA / XGA	SLIDE SHOW	Provided
IMAGE MODE	Text1 / Text2 / Text3 / Graphics1 / Graphics2	IMAGE SAVE	Provided
Graphical OSD	Provided	STATE PRESETTING	Provided
ILLUMINATION LAMP	White LED	BRIGHTNESS CONTROL	Provided
		SUPPORT FUNCTIONS	Provided

INTERFACE

INPUT TERMINALS	RGB input Mini D-sub 15P x 1 HDMI input Type A x 1 3.5mm stereo mini jack x 1	RGB OUTPUT	1080p 720p SXGA WXGA XGA
OUTPUT TERMINALS	RGB output Mini D-sub 15P x 1 HDMI output Type A x 1 3.5mm stereo mini jack x 1	HDMI OUTPUT	1080p 720p
USB 2.0	Provided (For PC connected, Type mini B)	MEMORY INTERFACE	SD, USB typeA

OTHERS

POWER SOURCE	12VDC (AC adapter AC100 - 240V)	POWER CONSUMPTION	16.2W
DIMENSIONS	W355 x D373.5 x H426.5mm (Setup) W355 x D294 x H469mm (Folded)	WEIGHT	Approx 3.2kg
ACCESSORIES	Power cord, AC adapter, USB cable, Remote control, AAA batteries, CD-ROM		

Design and specifications are subject to change without prior notice. The images in this brochure are simulated.
 "ELMO" is a trademark of ELMO COMPANY, LIMITED. . SD logo is a trademark.
 Other brand names and product names may be trademarks or registered trademarks of their respective owners.

VERTEX®

ผู้นำเข้าและจำหน่ายอย่างเป็นทางการ
 บริษัท เวิร์ททรี ซีพเพลย จำกัด www.vertex.co.th
 โทร. 02-938-1051



ตัวแทนจำหน่าย